


CABLE COMPRESSIVE LUGS GP
КАБЕЛЬНЫЕ НАКОНЕЧНИКИ GP
COSSES GP



MATERIAL: Cu
STANDARD: DIN 46234
МАТЕРИАЛ: Cu
СТАНДАРТ: DIN 46234
MATÉRIEL: Cu
STANDARD: DIN 46234

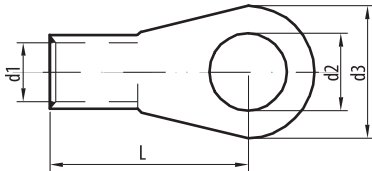

No. n/nj N. Ord.	Cable cross-section Сечение провода Section	Code Код (номер) Code	Type Тип Type	Dimension (mm) Размер (мм) Dimensions (mm)				Packing Упаковка Emballage	Weight Бec Poids
				d1	d2	d3	L		
42	35	D40-05-42	GP 35/6	9.0	6.5	15.0	26.0	100/1000	9.11
43	35	D40-05-43	GP 35/8	9.0	8.4	16.0	26.0	100/1000	8.90
44	35	D40-05-44	GP 35/10	9.0	10.5	18.0	27.0	100/1000	9.50
45	35	D40-05-45	GP 35/12	9.0	13.0	22.0	31.0	100/1000	10.96
46	35	D40-05-92	GP 35/14	9.0	15.0	22.0	31.0	100/1000	11.10
47	35	D40-05-46	GP 35/16	9.0	17.0	28.0	36.0	100/1000	13.41
48	50	D40-05-79	GP 50/6	11.0	6.5	18.0	34.0	100/1000	19.60
49	50	D40-05-47	GP 50/8	11.0	8.4	18.0	34.0	100/1000	18.68
50	50	D40-05-48	GP 50/10	11.0	10.5	18.0	34.0	100/1000	18.32
51	50	D40-05-49	GP 50/12	11.0	13.0	22.0	36.0	100/1000	19.90
52	50	D40-05-87	GP 50/14	11.0	15.0	22.0	36.0	100/1000	21.20
53	50	D40-05-50	GP 50/16	11.0	17.0	28.0	40.0	100/1000	22.56
54	70	D40-05-74	GP 70/6	13.0	6.5	22.0	38.0	100/1000	24.22
55	70	D40-05-75	GP 70/8	13.0	8.4	22.0	38.0	100/1000	24.04
56	70	D40-05-51	GP 70/10	13.0	10.5	22.0	38.0	100/1000	25.30
57	70	D40-05-52	GP 70/12	13.0	13.0	22.0	38.0	100/1000	24.58
58	70	D40-05-88	GP 70/14	13.0	15.0	22.0	38.0	100/1000	25.12
59	70	D40-05-53	GP 70/16	13.0	17.0	28.0	42.0	100/1000	26.98
60	70	D40-05-84	GP 70/20	13.0	21.0	28.0	42.0	100/1000	24.56
61	95	D40-05-76	GP 95/8	15.0	8.4	24.0	42.0	50/200	41.28
62	95	D40-05-54	GP 95/10	15.0	10.5	24.0	42.0	50/200	40.96
63	95	D40-05-55	GP 95/12	15.0	13.0	24.0	42.0	50/200	40.00
64	95	D40-05-89	GP 95/14	15.0	15.0	24.0	42.0	50/200	40.20
65	95	D40-05-56	GP 95/16	15.0	17.0	28.0	44.0	50/200	39.42
66	95	D40-05-83	GP 95/20	15.0	21.0	28.0	44.0	50/200	36.63
67	120	D40-05-77	GP 120/8	16.5	8.4	24.0	44.0	50/200	57.10
68	120	D40-05-57	GP 120/10	16.5	10.5	24.0	44.0	50/200	56.16
69	120	D40-05-58	GP 120/12	16.5	13.0	24.0	44.0	50/200	55.08
70	120	D40-05-85	GP 120/14	16.5	15.0	24.0	44.0	50/200	53.85
71	120	D40-05-59	GP 120/16	16.5	17.0	28.0	48.0	50/200	57.88
72	120	D40-05-93	GP 120/20	16.5	21.0	28.0	48.0	50/200	54.24
73	150	D40-05-80	GP 150/8	19.0	8.4	30.0	50.0	25/100	75.00
74	150	D40-05-78	GP 150/10	19.0	10.5	30.0	50.0	25/100	74.16
75	150	D40-05-60	GP 150/12	19.0	13.0	30.0	50.0	25/100	72.24
76	150	D40-05-82	GP 150/14	19.0	15.0	30.0	50.0	25/100	71.00
77	150	D40-05-61	GP 150/16	19.0	17.0	30.0	50.0	25/100	69.71
78	150	D40-05-96	GP 150/20	19.0	21.0	30.0	50.0	25/100	67.00
79	185	D40-05-70	GP 185/10	21.0	10.5	36.0	50.0	25/100	89.52
80	185	D40-05-71	GP 185/12	21.0	13.0	36.0	50.0	25/100	88.00
81	185	D40-05-64	GP 185/14	21.0	15.0	36.0	50.0	25/100	89.20
82	185	D40-05-62	GP 185/16	21.0	17.0	36.0	50.0	25/100	87.12
83	185	D40-05-97	GP 185/20	21.0	21.0	36.0	50.0	25/100	84.00
84	240	D40-05-72	GP 240/10	23.5	10.5	38.0	56.0	25/100	151.15
85	240	D40-05-73	GP 240/12	23.5	13.0	38.0	56.0	25/100	149.70
86	240	D40-05-90	GP 240/14	23.5	15.0	38.0	56.0	25/100	146.00
87	240	D40-05-63	GP 240/16	23.5	17.0	38.0	56.0	25/100	144.00
88	240	D40-05-98	GP 240/20	23.5	21.0	38.0	56.0	25/100	142.00