




UNIMAX - ALUMINIUM PG CONNECTORS
UNIMAX ЗАЖИМ AL (алюминиевый)
UNIMAX - RACCORDS ALUMINIUM À RAINURES PARALLÉLES

Designed for connection of two non-insulated Al conductors.
 Применяется для соединения два алюминиевых неизолированных провода.
 On les utilise pour joindre les deux conducteurs non-isolés d'aluminium.

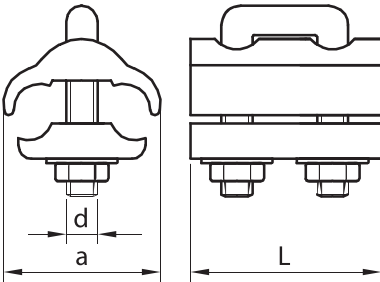


MATERIJAL: Al
 STANDARD: SRPS N.F4.101
 МАТЕРИАЛ: Al
 СТАНДАРТ: SRPS N.F4.101
 MATÉRIEL: Al
 STANDARD: SRPS N.F4.101



No. n/nj N. Ord.	Cable cross-section Сечение провода Section	Code Код (номер) Code	Type Тип Type	Dimension (mm) Размер (мм) Dimension (mm)			Packing Упаковка Emballage	Weight Вес Poids
				d	a	L		
1	4-25	P41-29-02	Al 4 - 25	M6	25.5	39	50/300	43.00
2	6-35	P41-29-03	Al 6 - 35	M6	30	40	50/300	51.60
3	6-50	P41-29-04	Al 6 - 50	M8	34	45	50/250	90.60
4	10-95	P41-29-05	Al 10 - 95	M8	40	53	25/150	117.74
5	25-150	P41-29-06	Al 25 - 150	M10	50	64	25/100	229.30

UNIMAX - ALUMINIUM PG CONNECTORS
UNIMAX ЗАЖИМ AL (алюминиевый)
UNIMAX - RACCORDS ALUMINIUM À RAINURES PARALLÉLES

Designed for connection of two non-insulated Al conductors.
 Применяется для соединения два алюминиевых неизолированных провода.
 On les utilise pour joindre les deux conducteurs non-isolés d'aluminium.

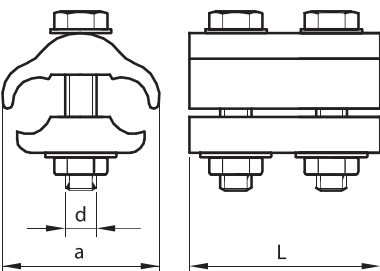

MATERIJAL: Al
 STANDARD: DIN 48072/1
 МАТЕРИАЛ: Al
 СТАНДАРТ: DIN 48072/1
 MATÉRIEL: Al
 STANDARD: DIN 48072/1



No. n/nj N. Ord.	Cable cross-section Сечение провода Section	Code Код (номер) Code	Type Тип Type	Dimension (mm) Размер (мм) Dimension (mm)			Packing Упаковка Emballage	Weight Вес Poids
				d	a	L		
1	4-25	D41-29-02	Al 4-25	M6	25.5	39	50/300	45.00
2	6-35	D41-29-03	Al 6-35	M6	30	40	50/300	50.00
3	6-50	D41-29-04	Al 6-50	M8	34	45	50/250	97.00
4	10-95	D41-29-05	Al 10-95	M8	40	53	25/150	127.80
5	25-150	D41-29-06	Al 25-150	M10	50	64	25/100	229.20
6	10-95	P41-29-26	Al 10-95/3	M10	40	78	25/100	200.00
7	25-150	P41-29-25	Al 25-150/3	M10	50	90	25/100	325.00

