




AlCu CABLE COMPRESSIVE LUGS
КАБЕЛЬНЫЕ НАКОНЕЧНИКИ ALCU
COSSES ALUMINIUM-CUIVRE



MATERIAL: Al, Cu
STANDARD: SRPS N.F4.101
МАТЕРИАЛ: Al, Cu
СТАНДАРТ: SRPS N.F4.101
MATÉRIEL: Al, Cu
STANDARD: SRPS N.F4.101

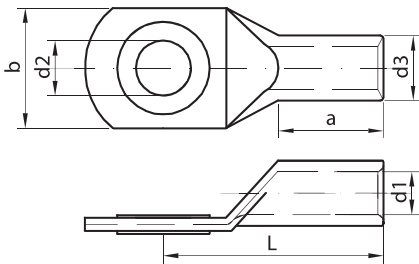

No. п/п N. Ord.	Cable cross-section Сечение провода Section	Code Код (номер) Code	Type Тип Type	Dimension (mm) Размер (мм) Dimensions (mm)						Num.of pressmark* Номер опрессовки* Nombre de les sertissages*	Packing Упаковка Emballage	Weight Вес Poids
				a	b	d1	d2	d3	L			
1	16	D40-52-01	AlCu 16/6	32	21.3	5.8	6.5	12	50	4 / 2	100/500	16.10
2	16	D40-52-02	AlCu 16/8	32	21.3	5.8	8.5	12	50	4 / 2	100/500	16.47
3	16	D40-52-38	AlCu 16/10	32	21.3	5.8	10.5	12	50	4 / 2	100/500	18.80
4	25	D40-52-03	AlCu 25/8	38	21.3	6.8	8.5	12	60	4 / 2	100/500	18.25
5	25	D40-52-04	AlCu 25/10	38	23	6.8	10.5	12	60	4 / 2	100/500	18.52
6	25	D40-52-34	AlCu 25/12	38	27.5	8	10.5	12	60	4 / 2	100/500	20.42
7	35	D40-52-30	AlCu 35/8	42	21	8	8.5	14	67	5 / 3	100/500	23.66
8	35	D40-52-05	AlCu 35/10	42	26	8	10.5	14	67	5 / 3	100/500	25.10
9	35	D40-52-06	AlCu 35/12	42	28.5	8	13	14	67	5 / 3	100/500	28.74
10	50	D40-52-31	AlCu 50/8	45	25	9.8	8.5	16	72	5 / 3	100/500	30.00
11	50	D40-52-07	AlCu 50/10	45	25	9.8	10.5	16	72	5 / 3	100/500	31.38
12	50	D40-52-08	AlCu 50/12	45	28	9.8	13	16	72	5 / 3	100/500	34.69
13	70	D40-52-35	AlCu 70/8	52	28	11.2	8.5	18.5	86	6 / 3	50/250	47.75
14	70	D40-52-09	AlCu 70/10	52	28	11.2	10.5	18.5	86	6 / 3	50/250	48.36
15	70	D40-52-10	AlCu 70/12	52	30	11.2	13	18.5	86	6 / 3	50/250	51.32
16	70	D40-52-39	AlCu 70/16	52	28	11.2	17	18.5	86	6 / 3	50/250	52.00
17	95	D40-52-11	AlCu 95/10	56	34	13.2	10.5	22	90	6 / 3	50/250	61.00
18	95	D40-52-12	AlCu 95/12	56	34	13.2	13	22	90	6 / 3	50/250	72.40
19	95	D40-52-13	AlCu 95/16	56	34	13.2	17	22	90	6 / 3	50/250	72.75
20	120	D40-52-32	AlCu 120/10	58	34	14.7	10.5	23	92	6 / 3	50/250	73.59
21	120	D40-52-14	AlCu 120/12	58	34	14.7	13	23	92	6 / 3	50/250	74.10
22	120	D40-52-15	AlCu 120/16	58	36	14.7	17	23	92	6 / 3	50/250	74.50
23	150	D40-52-33	AlCu 150/10	60	35	16.3	10.5	25	103	6 / 3	25/150	95.00
24	150	D40-52-16	AlCu 150/12	60	35	16.3	13	25	103	6 / 3	25/150	97.00
25	150	D40-52-17	AlCu 150/16	60	38	16.3	17	25	103	6 / 3	25/150	99.00
26	150	D40-52-18	AlCu 150/20	60	40	16.3	21	25	103	6 / 3	25/150	102.00
27	185	D40-52-36	AlCu 185/10	62	40	18.3	10.5	28.5	106	7 / 3	25/100	130.50
28	185	D40-52-19	AlCu 185/12	62	40	18.3	13	28.5	106	7 / 3	25/100	131.86
29	185	D40-52-20	AlCu 185/16	62	40	18.3	17	28.5	106	7 / 3	25/100	132.20
30	185	D40-52-21	AlCu 185/20	62	44	18.3	21	28.5	106	7 / 3	25/100	133.10
31	240	D40-52-22	AlCu 240/12	65	44	21	13	32	116	8 / 3	25/100	173.40
32	240	D40-52-23	AlCu 240/16	65	44	21	17	32	116	8 / 3	25/100	187.50
33	240	D40-52-24	AlCu 240/20	65	45	21	21	32	116	8 / 3	25/100	189.20
34	300	D40-52-25	AlCu 300/16	70	49	23.3	17	34	124	8 / 3	10/50	210.00
35	300	D40-52-26	AlCu 300/20	70	49	23.3	21	34	124	8 / 3	10/50	213.00

* - Number of mechanical (manual) crimps/number of hydraulic crimps
Количество механических (ручных) опрессовок / количество гидравлических опрессовок
Le nombre des pressages mécaniques (manuels) / nombre des pressages hydrauliques

